
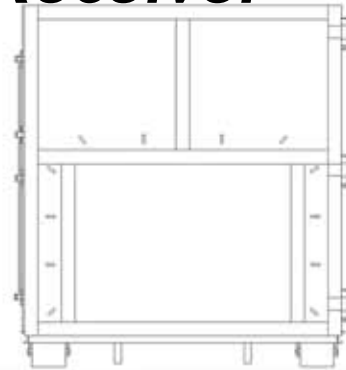


## Octagon Packer Receiver

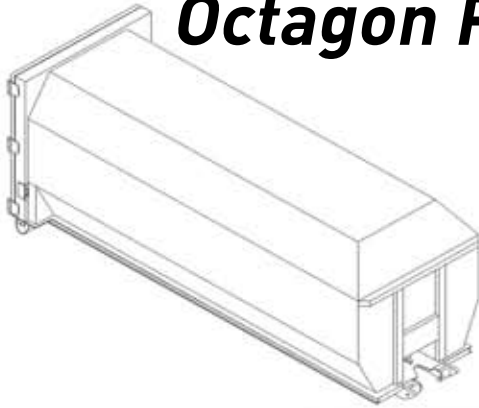

### Specifications:

UNDERSTRUCTURE.....	3" STRUCTURAL CHANNEL 4.1 LBS/FT AT 17.5" ON CENTER
LONG RAILS.....	2" X 6" X 1/4" TUBING
BULLNOSE.....	SOLID 1 1/4" PLATE BURNOUT
FLOOR.....	3/16" 2 PIECES BUTT WELDED
PUSH PLATE.....	26" X 16" X 3/16"
HOOK PLATE.....	23" X 15" X 3/4"
WHEELS.....	8" X 10" LONG (REAR ONLY)
WHEEL AXLES.....	1 1/2" SOLID ROUND BAR WITH GREASE ZERKS
NOSE ROLLERS.....	MACHINED 4" DIAMETER X 6" LONG WITH GREASE ZERKS
SIDE, WALL, AND ROOF.....	7 GAUGE WITH 5" TAPER PER SIDE FROM REAR TO FRONT
BULKHEAD.....	7 GAUGE
FRONT POST.....	2" X 5" FORMED
TAILGATE SHEET.....	7 GAUGE
TAILGATE FRAME.....	ALL 3" X 4" X 7 GAUGE TUBING
REAR CORNER POST.....	2" X 6" X 1/4" TUBING
TAILGATE LATCH.....	VERTICAL LIFT HANDLE
HINGES.....	HEAVY DUTY MACHINE TYPE WITH GREASE ZERKS (THREE ON 62" AND HIGHER)
PAINT.....	EXTERIOR ONE SOLID COLOR INTERIOR AND BOTTOM PRIME
OPTIONS.....	VARIOUS HOOKUPS, PACKER SIZING, AUGER OPTIONS, AND BUILT TO CUSTOMER SPECIFICATIONS

Specifications subject to change. With or without notice. Not warranted for any specific purpose.